


Drive adapter

Standard configurations and
machine specific executions upon request

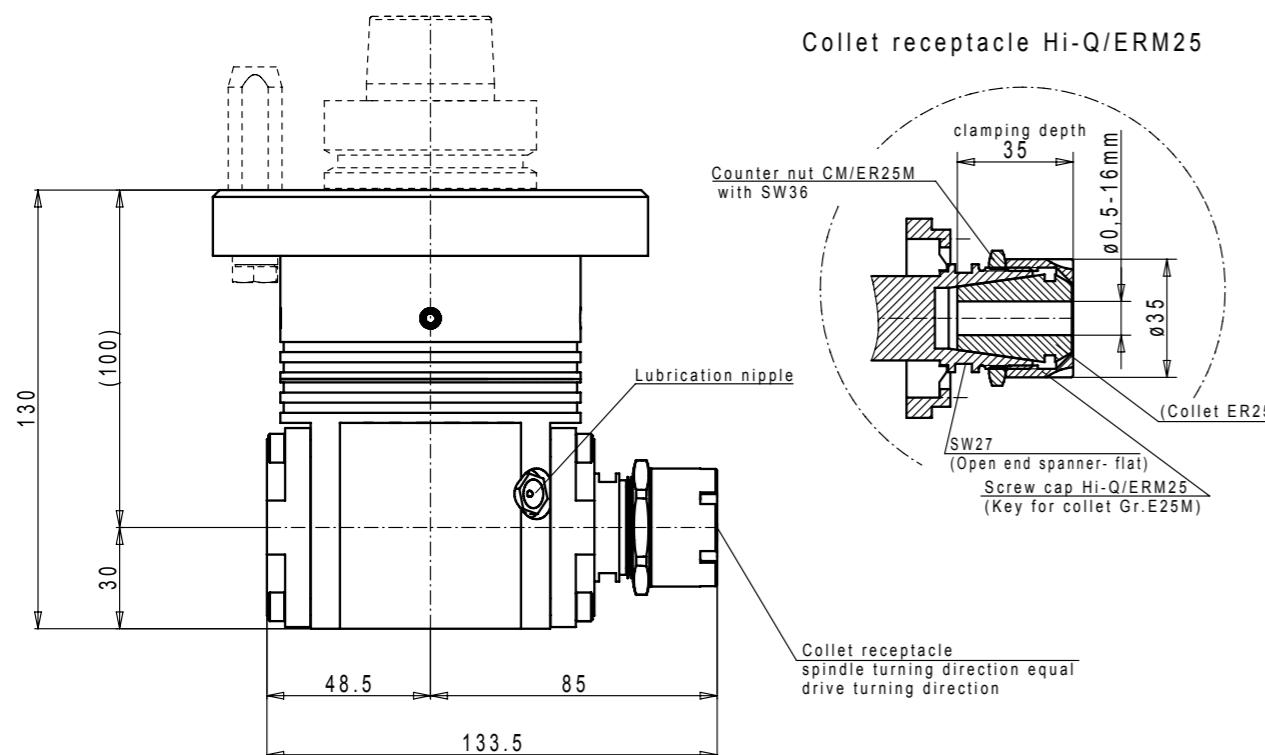

Technical features


Item Id.	EP-030651
drive turning direction	R.H./L.H.
drive speed max.	permanent operation 645 – 10.968 rpm
drive speed max.	interval operation 645 – 12.903 rpm
number of spindles	1
spindle position	horizontal
tool receptacle	1x Hi-Q/ERM25 DIN6499-C (8°) for collet ER25 DIN 6499-B (\varnothing 0,5- \varnothing 16 mm)
turning direction of tool receptacle	1x equal to drive turning direction
gear ratio	1 : 1,55 – gear driven
spindle speed max.	permanent operation 1.000 – 17.000 rpm
spindle speed max.	interval operation 1.000 – 20.000 rpm
drive capacity	3,0 kW
weight with drive adapter	approx. 4,00 kg

Optional accessories:

- Key for collet E 25M
- Open end spanner SW 27 flat
- Open end spanner SW 36
- Lubrication press

- Item Id. 137002
- Item Id. 131027
- Item Id. 131036
- Item Id. 980003

The angular heads of the series G06-1.1 have a continuous machining spindle. The drive speed is transmitted in a ratio 1:1,55 to the tool receptacles. The maximum spindle speed in interval operation is 20,000 rpm.

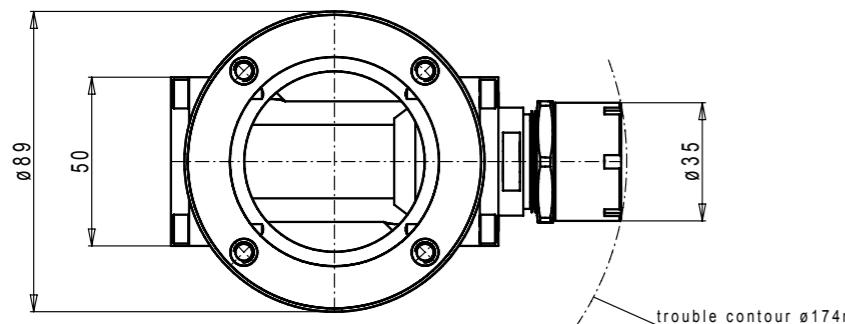

Variants on demand!

